




- Self-locking feed front for large stock.



- Individually unlocking via pushbutton control.

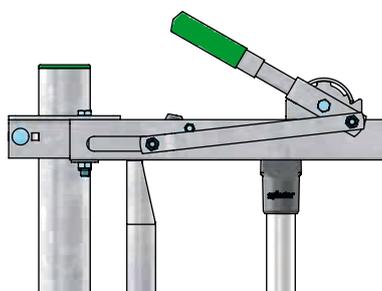

- A self-locking feed front with a length of up to 30 m can be operated with one handle.

**Baseline self-locking feed fronts**


Simple but strong, these are the Baseline self-locking feed fronts. Fitted with the closed upper section with hidden locking mechanism, as is a characteristic feature of Spinder. Only the push button for releasing the locked-in cow sticks out from the top of the profile. No parts where collars can be caught!

Available for large stock as well as for heifers, young stock and calves. Various feed place widths and matching heights. This allows the animals to get used to the feed front from an early age. Fitted with the Spinder plastic movable bar stopper; nice and quiet, and with a drop pin in the catching bar to prevent catching of the collars.


Important features:

- The central operating handle allows you to open or close up to 30 m feed front in one move.
- The central operating handle can be used to set the entire feed fence in the locking position;
- Great catching performance thanks to the light-acting locking mechanism;
- The animals are unable to release themselves since the locking mechanism is entirely hidden in the upper section;
- When closed, it will be possible to release the individual animals with a simple push of a button;
- The central operating handle can be used to release all animals in one move;
- Using the optional Indivast locking mechanism, the animals can be individually secured in the feed front;
- Ear tag friendly.

Animal type	Cows	Heifers		Young heifers	Calves
age	from 18 months	approx. 9 to 18 months		approx. 3 to 9 months	till approx. 3 months
feeding place width	65, 70, 75 cm	55 cm	55 cm	45 cm	35 cm
neck width	20 cm	18 cm			
adjustable neck width			15 cm	10 cm	8 cm

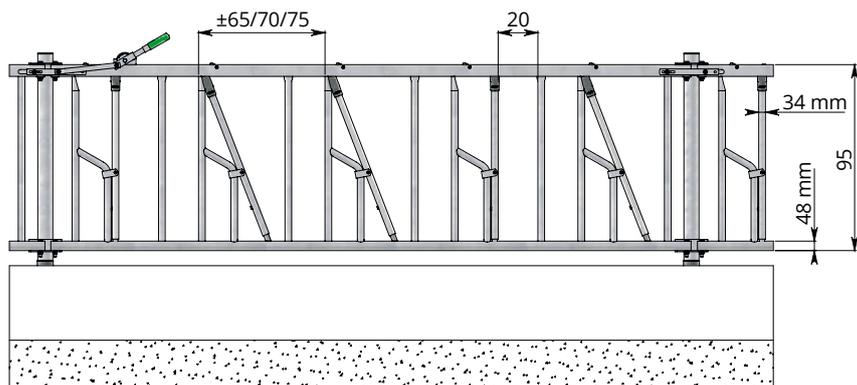


Sectional view installed front

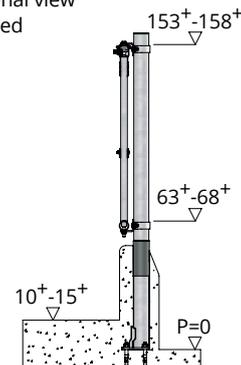

	Length (center to center)	Feeding place width
24.61.500	325 cm (5 feed openings)	approx. 65 cm
24.61.440	300 cm (4 feed openings)	approx. 75 cm
24.61.420	282 cm (4 feed openings)	approx. 70 cm
24.61.400	262 cm (4 feed openings)	approx. 65 cm
24.61.360	248 cm (4 feed openings)	approx. 65 cm
24.61.340	225 cm (3 feed openings)	approx. 75 cm
24.61.320	214 cm (3 feed openings)	approx. 70 cm
24.61.300	198 cm (3 feed openings)	approx. 65 cm
24.61.260	184 cm (3 feed openings)	approx. 65 cm
24.61.240	150 cm (2 feed openings)	approx. 75 cm
24.61.200	134 cm (2 feed openings)	approx. 65 cm

	Fittings
10.25.180	Support post 76 mm x 180 cm
11.02.250	Plastic protective sleeve 76 mm
10.26.160	Floor-mounted support post 76 mm x 160 cm
11.06.250	Stopper 76 mm
02.91.100	Set of feed front fasteners 76 mm
22.92.680	Operating handle
02.90.285	Hinge assembly for gate
02.90.950	Castor wheel (for gates longer than 2 m)

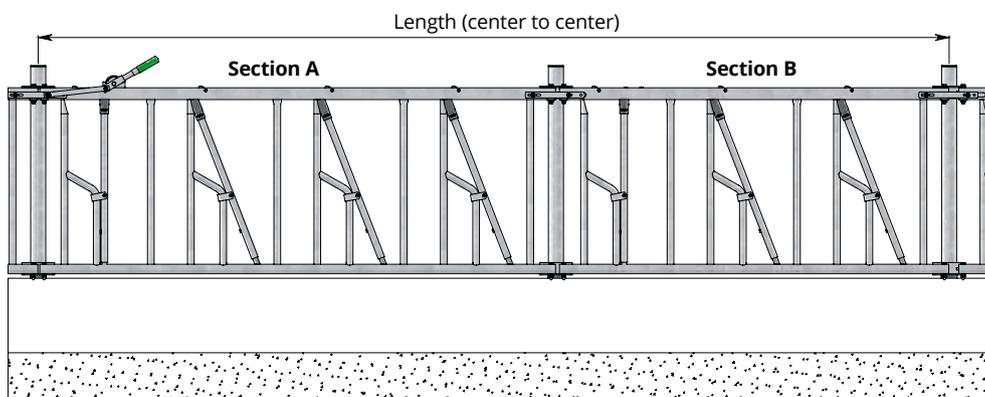

Almost all clearances of over 3.25 meters between posts, can be filled with a combination of the above mentioned standard feed fronts. The following table shows solutions for some frequent situations. The combination of a standard feed front and the correct feed front fastener leads almost always to a solution for clearances up to 3.25 mtr.

Length (center to center)	Section A	Section B	Feed front fasteners
600 cm (9 feed openings)	(325 cm) 24.61.500	(262 cm) 24.61.400	02.91.200 (5-10 cm) *
500 cm (8 feed openings)	(248 cm) 24.61.360	(248 cm) 24.61.360	02.91.100 (0 - 5 cm)
500 cm (7 feed openings)	(282 cm) 24.61.420	(214 cm) 24.61.320	02.91.100 (0 - 5 cm)
475 cm (7 feed openings)	(262 cm) 24.61.400	(198 cm) 24.61.300	02.91.200 (5-10 cm) *
450 cm (7 feed openings)	(248 cm) 24.61.360	(198 cm) 24.61.300	02.91.100 (0 - 5 cm)
450 cm (6 feed openings)	(225 cm) 24.61.340	(225 cm) 24.61.340	02.91.100 (0 - 5 cm)
440 cm (7 feed openings)	(248 cm) 24.61.360	(184 cm) 24.61.260	02.91.100 (0 - 5 cm)

\* For feed front fasteners of 5-10 cm and 10-20 cm, longer connecting strips need to be ordered.